

DRAWING INDEX

AO.1 TITLE SHEET/ SITE PLAN
 A1.1 SITE PLAN
 A2.1 PROPOSED FLOOR PLAN
 A2.2 EXISTING FLOOR PLAN, DEMOLITION PLAN
 A3.1 EXTERIOR ELEVATIONS
 A3.2 EXTERIOR ELEVATIONS
 AG.1 ELECTRICAL PLAN
 A7.1 ROOF PLAN
 TOTAL: 8 SHEETS

PRESCRIPTIVE INSULATION

2018 IRC TABLES 402.1
 WINDOWS: U FACTOR: .30 MIN.
 SKYLIGHT: U FACTOR: .55 MIN.
 CEILING R-VALUE: 49 MIN.
 WOOD FRAMED WALLS: R VALUE: 20 MIN.
 FLOOR R-VALUE: 30 MIN.
 BASEMENT WALL R-VALUE: R-19.
 SLAB R-VALUE AND DEPTH: 10, 2 FEET MIN.
 CRAWL SPACE WALL R-VALUE: R-19.

UTILITIES

WATER: CITY OF COEUR D'ALENE
SEWER: CITY OF COEUR D'ALENE
NATURAL GAS: AVISTA
ELECTRIC: AVISTA (F.V.)
TELEPHONE: F.V.
CABLE: F.V.

SYMBOLS/ABBREVIATIONS

DETAIL			FINISH ELEVATION
			CENTER LINE
WALL SECTION			ANGLE
BLDG. SECTION		TYP.	TYPICAL
		S.F.	SQUARE FEET
		SQ.	SQUARE
		DIA.	DIAMETER
INTERIOR ELEV'S.		T.O.	TOP OF
		U.N.O.	UNLESS NOTED OTHERWISE
		O.C.	ON CENTER
		N.I.C.	NOT IN CONTRACT

ZONING

ADDRESS: 720 E POPLAR
 LEGAL DESCRIPTION: TAX #5 IN SEC 12-50-04W, TX #737
 EXT# #5 EX RW BLK N
 PARCEL: C-9560-
 ZONING: R-12 OON- 999- T
 SIZE: 1.02 ACRES

GENERAL NOTES:

EXCEPT WHERE THE DRAWINGS ARE MORE RESTRICTIVE, ALL WORK AND MATERIALS SHALL CONFORM WITH APPLICABLE REQUIREMENTS OF THE 2018 INTERNATIONAL RESIDENTIAL, MECHANICAL, FUEL GAS AND ENERGY EFFICIENT CODES, THE 2017 IDAHO STATE PLUMBING CODE, AND ALL APPLICABLE CITY, COUNTRY, AND STATE ORDINANCES, CODES, LAWS AND REGULATIONS.

CONTRACTOR SHALL VERIFY LOCATION OF ALL TRANSFORMERS AND UTILITIES UNDERGROUND WITH APPLICABLE UTILITY COMPANIES.

SUBCONTRACTORS SHALL BE RESPONSIBLE FOR COORDINATION OF THEIR WORK WITH THE WORK OF OTHERS. SUBCONTRACTORS SHALL VERIFY THAT ANY WORK RELATED TO THEM, WHICH MUST BE PROVIDED BY OTHERS, HAS BEEN COMPLETED TO CODE PRIOR TO COMMENCING THEIR WORK.

THESE DRAWINGS ARE DIVIDED INTO SECTIONS FOR CONVENIENCE ONLY. CONTRACTORS, SUBCONTRACTORS, AND MATERIAL SUPPLIERS SHALL REFER TO ALL RELEVANT SECTIONS IN BIDDING AND PERFORMING THEIR WORK, AND SHALL BE RESPONSIBLE FOR ALL ASPECTS OF THE WORK REGARDLESS OF WHERE THE INFORMATION OCCURS IN THE DRAWINGS.

THE CONTRACTOR IS REQUIRED TO VERIFY ALL EXISTING CONDITIONS AT THE JOB SITE.

LARGEST SCALE DRAWINGS SHALL GOVERN OVER SMALL-SCALE DRAWINGS.

SHOULD CONFLICT OCCUR IN OR BETWEEN DRAWINGS AND/OR SPECIFICATIONS, THE CONTRACTOR SHALL CONTACT THE ARCHITECT FOR VERIFICATION.

DIMENSIONS ARE TO FACE OF CONCRETE AND FACE OF STUDS AT EXTERIOR WALLS AND TO FACE OF STUDS AT INTERIOR WALLS UNLESS INDICATED OTHERWISE. DO NOT SCALE DRAWINGS.

ALL EXTERIOR WOOD FRAMED WALLS SHALL BE 2x6 @ 16" O.C. UNLESS OTHERWISE REQUIRED.

ALL INTERIOR WOOD FRAMED WALLS SHALL BE 2x4 @ 16" O.C. UNLESS OTHERWISE REQUIRED.

MECHANICAL & ELECT. SYSTEMS TO BE DESIGN-BUILD. CONTRACTOR TO VERIFY ALL MECH/ELECT. REQUIREMENTS WITH OWNER.

TRINITY CHURCH

720 E POPLAR AVE
 COEUR D'ALENE, ID

PRELIMINARY - NOT FOR CONSTRUCTION


TRINITY CHURCH
 720 E POPLAR AVE
 COEUR D'ALENE, ID

TITLE SHEET
 SHEET INDEX


A0.1



607 E. 6th Avenue
 Post Falls, Idaho 83854
 PH: (208) 773-9864
 mark@ml-architect.com

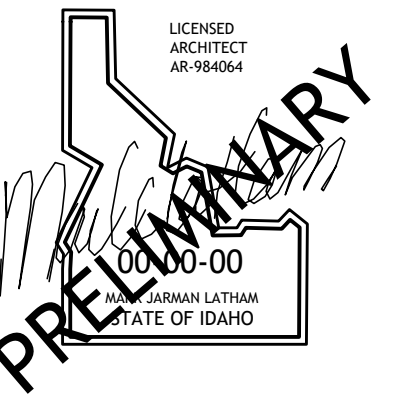


PROJECT NUMBER: 21-78
 DATE: 07-21
 DRAWN: -
 REVISIONS: -

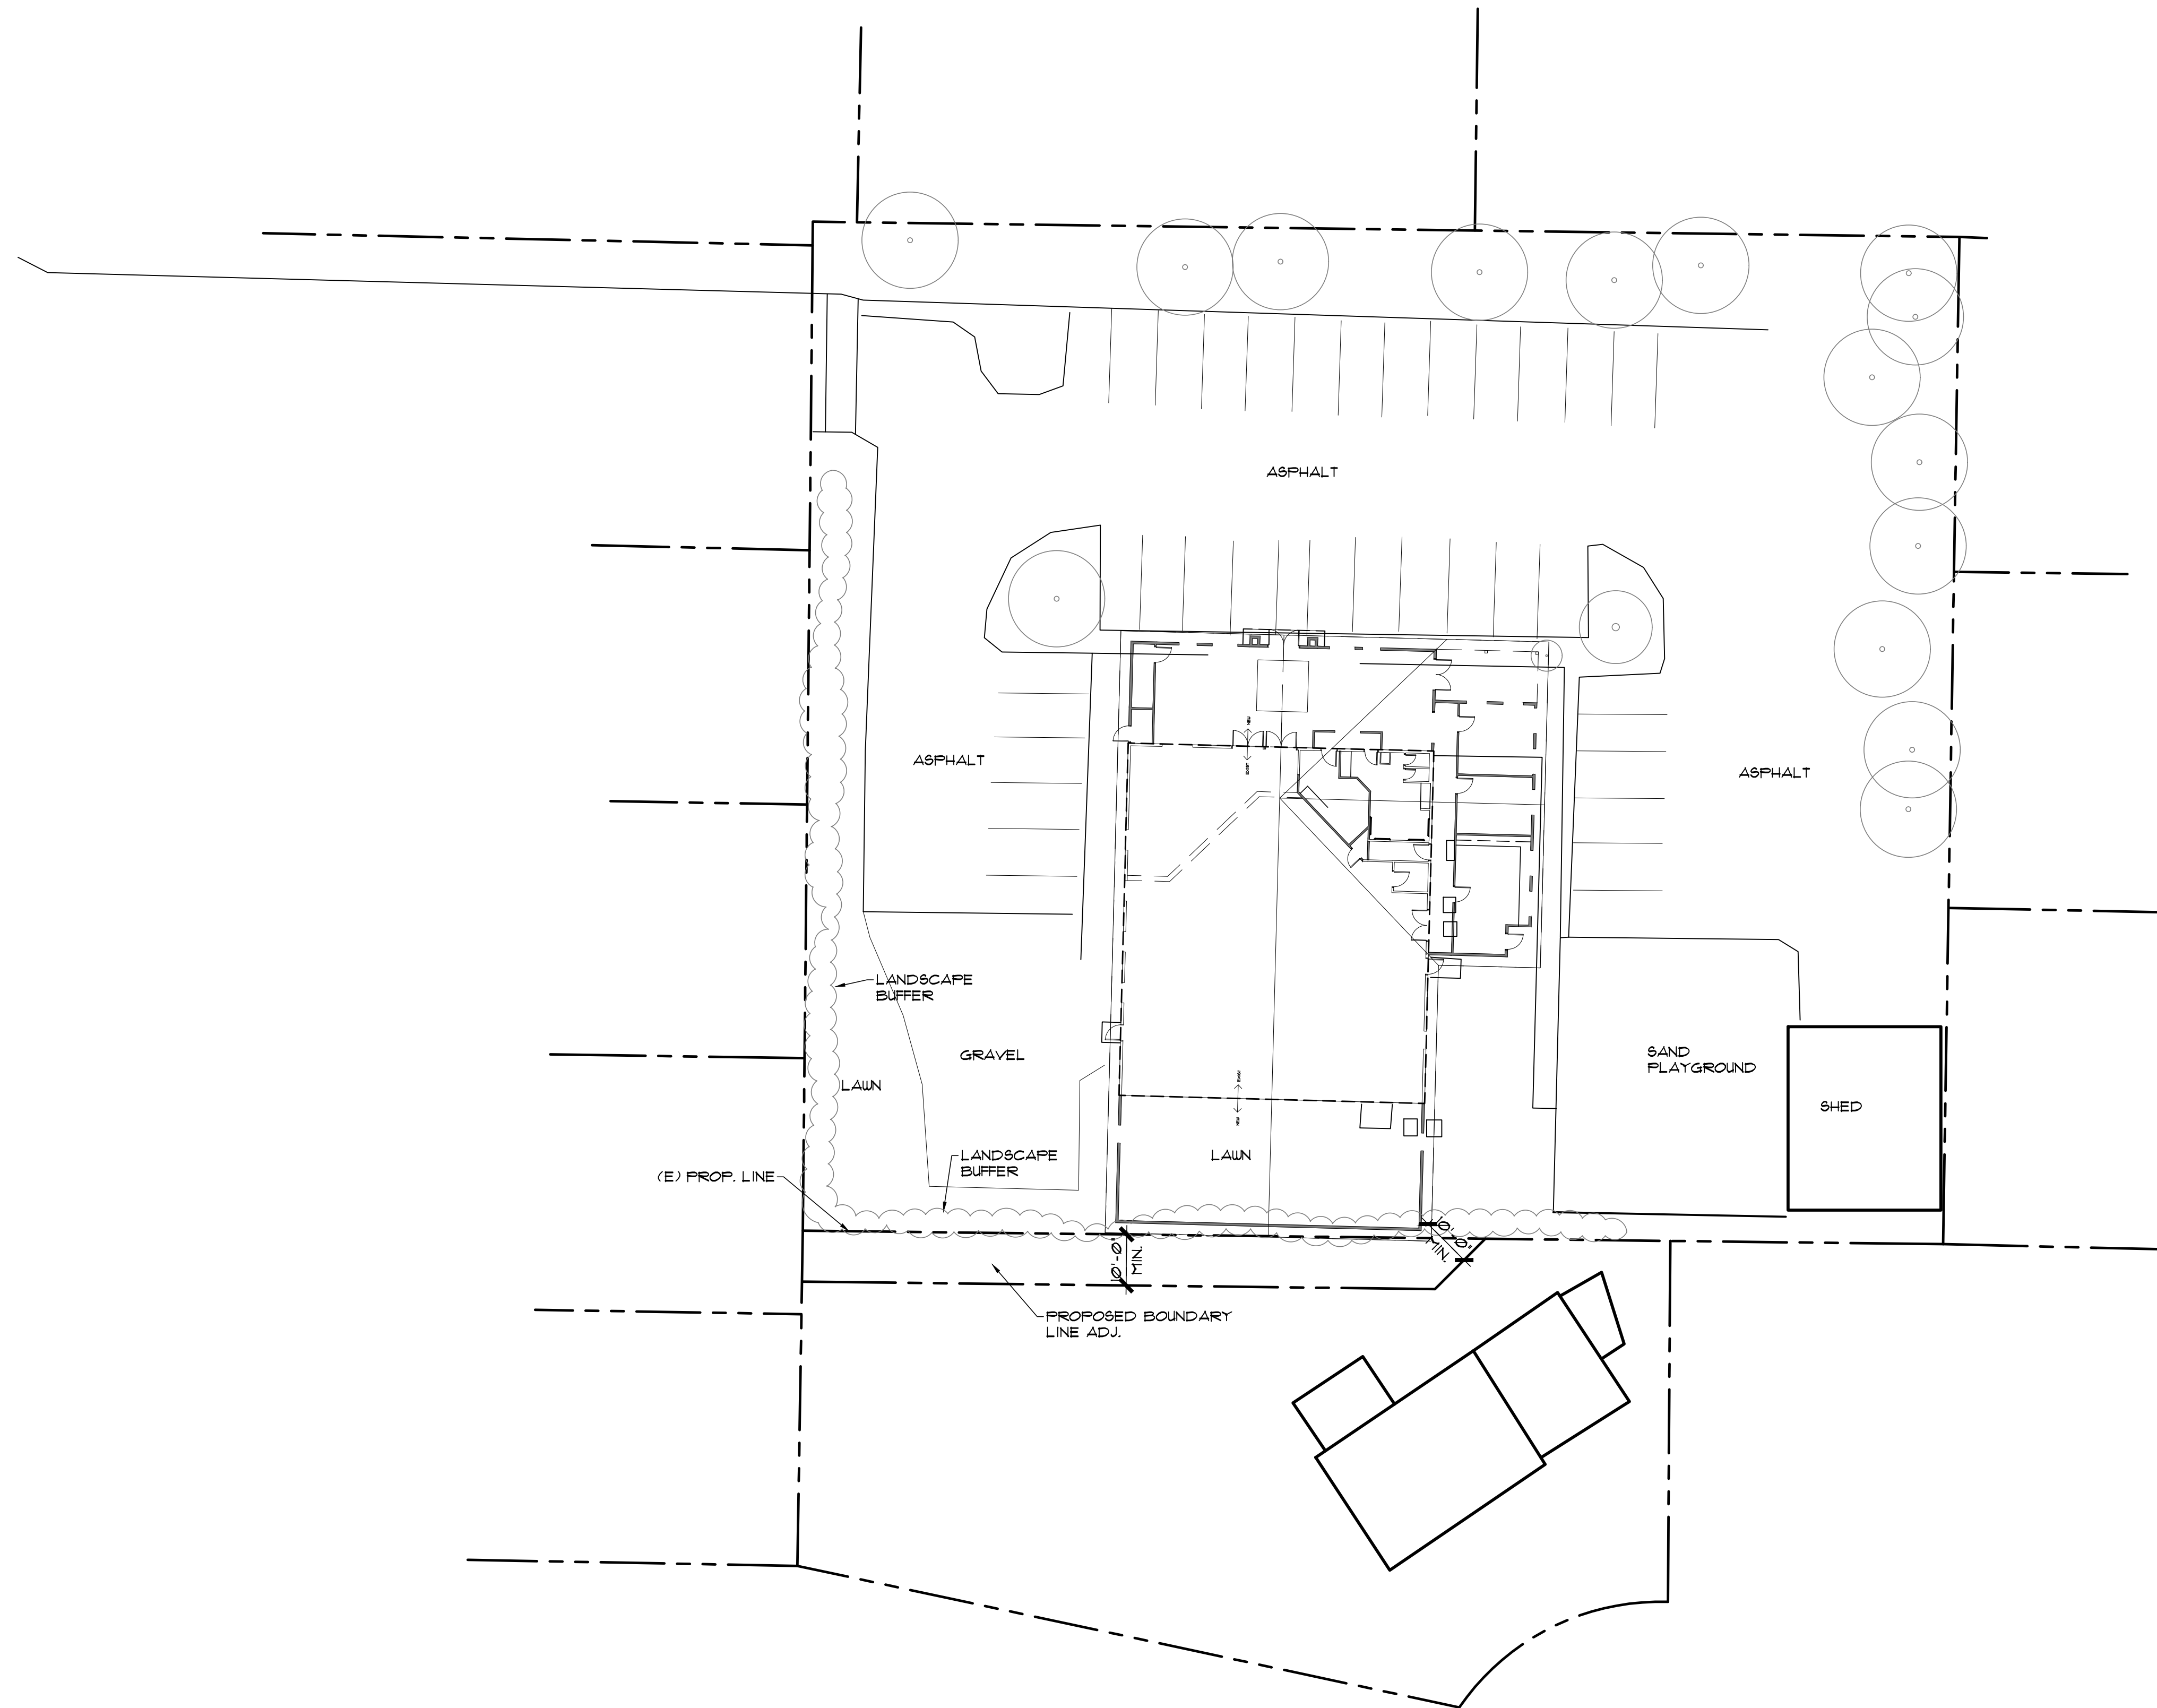

1
A1.1

SITE PLAN


SCALE: 1" = 20'-0"



PRELIMINARY - NOT FOR CONSTRUCTION



607 E. 6th Avenue
Post Falls, Idaho 83854
PH: (208) 773-9864
mark@ml-architect.com

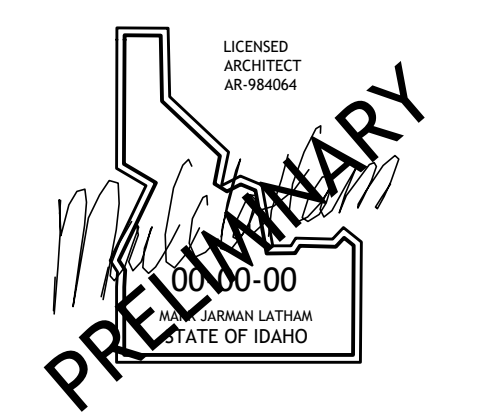


PROJECT NUMBER: 21-78
DATE: 07-21
DRAWN: -
REVISIONS: -

TRINITY CHURCH
720 E POPLAR AVE
COEUR D'ALENE, ID

SITE PLAN



A1.1

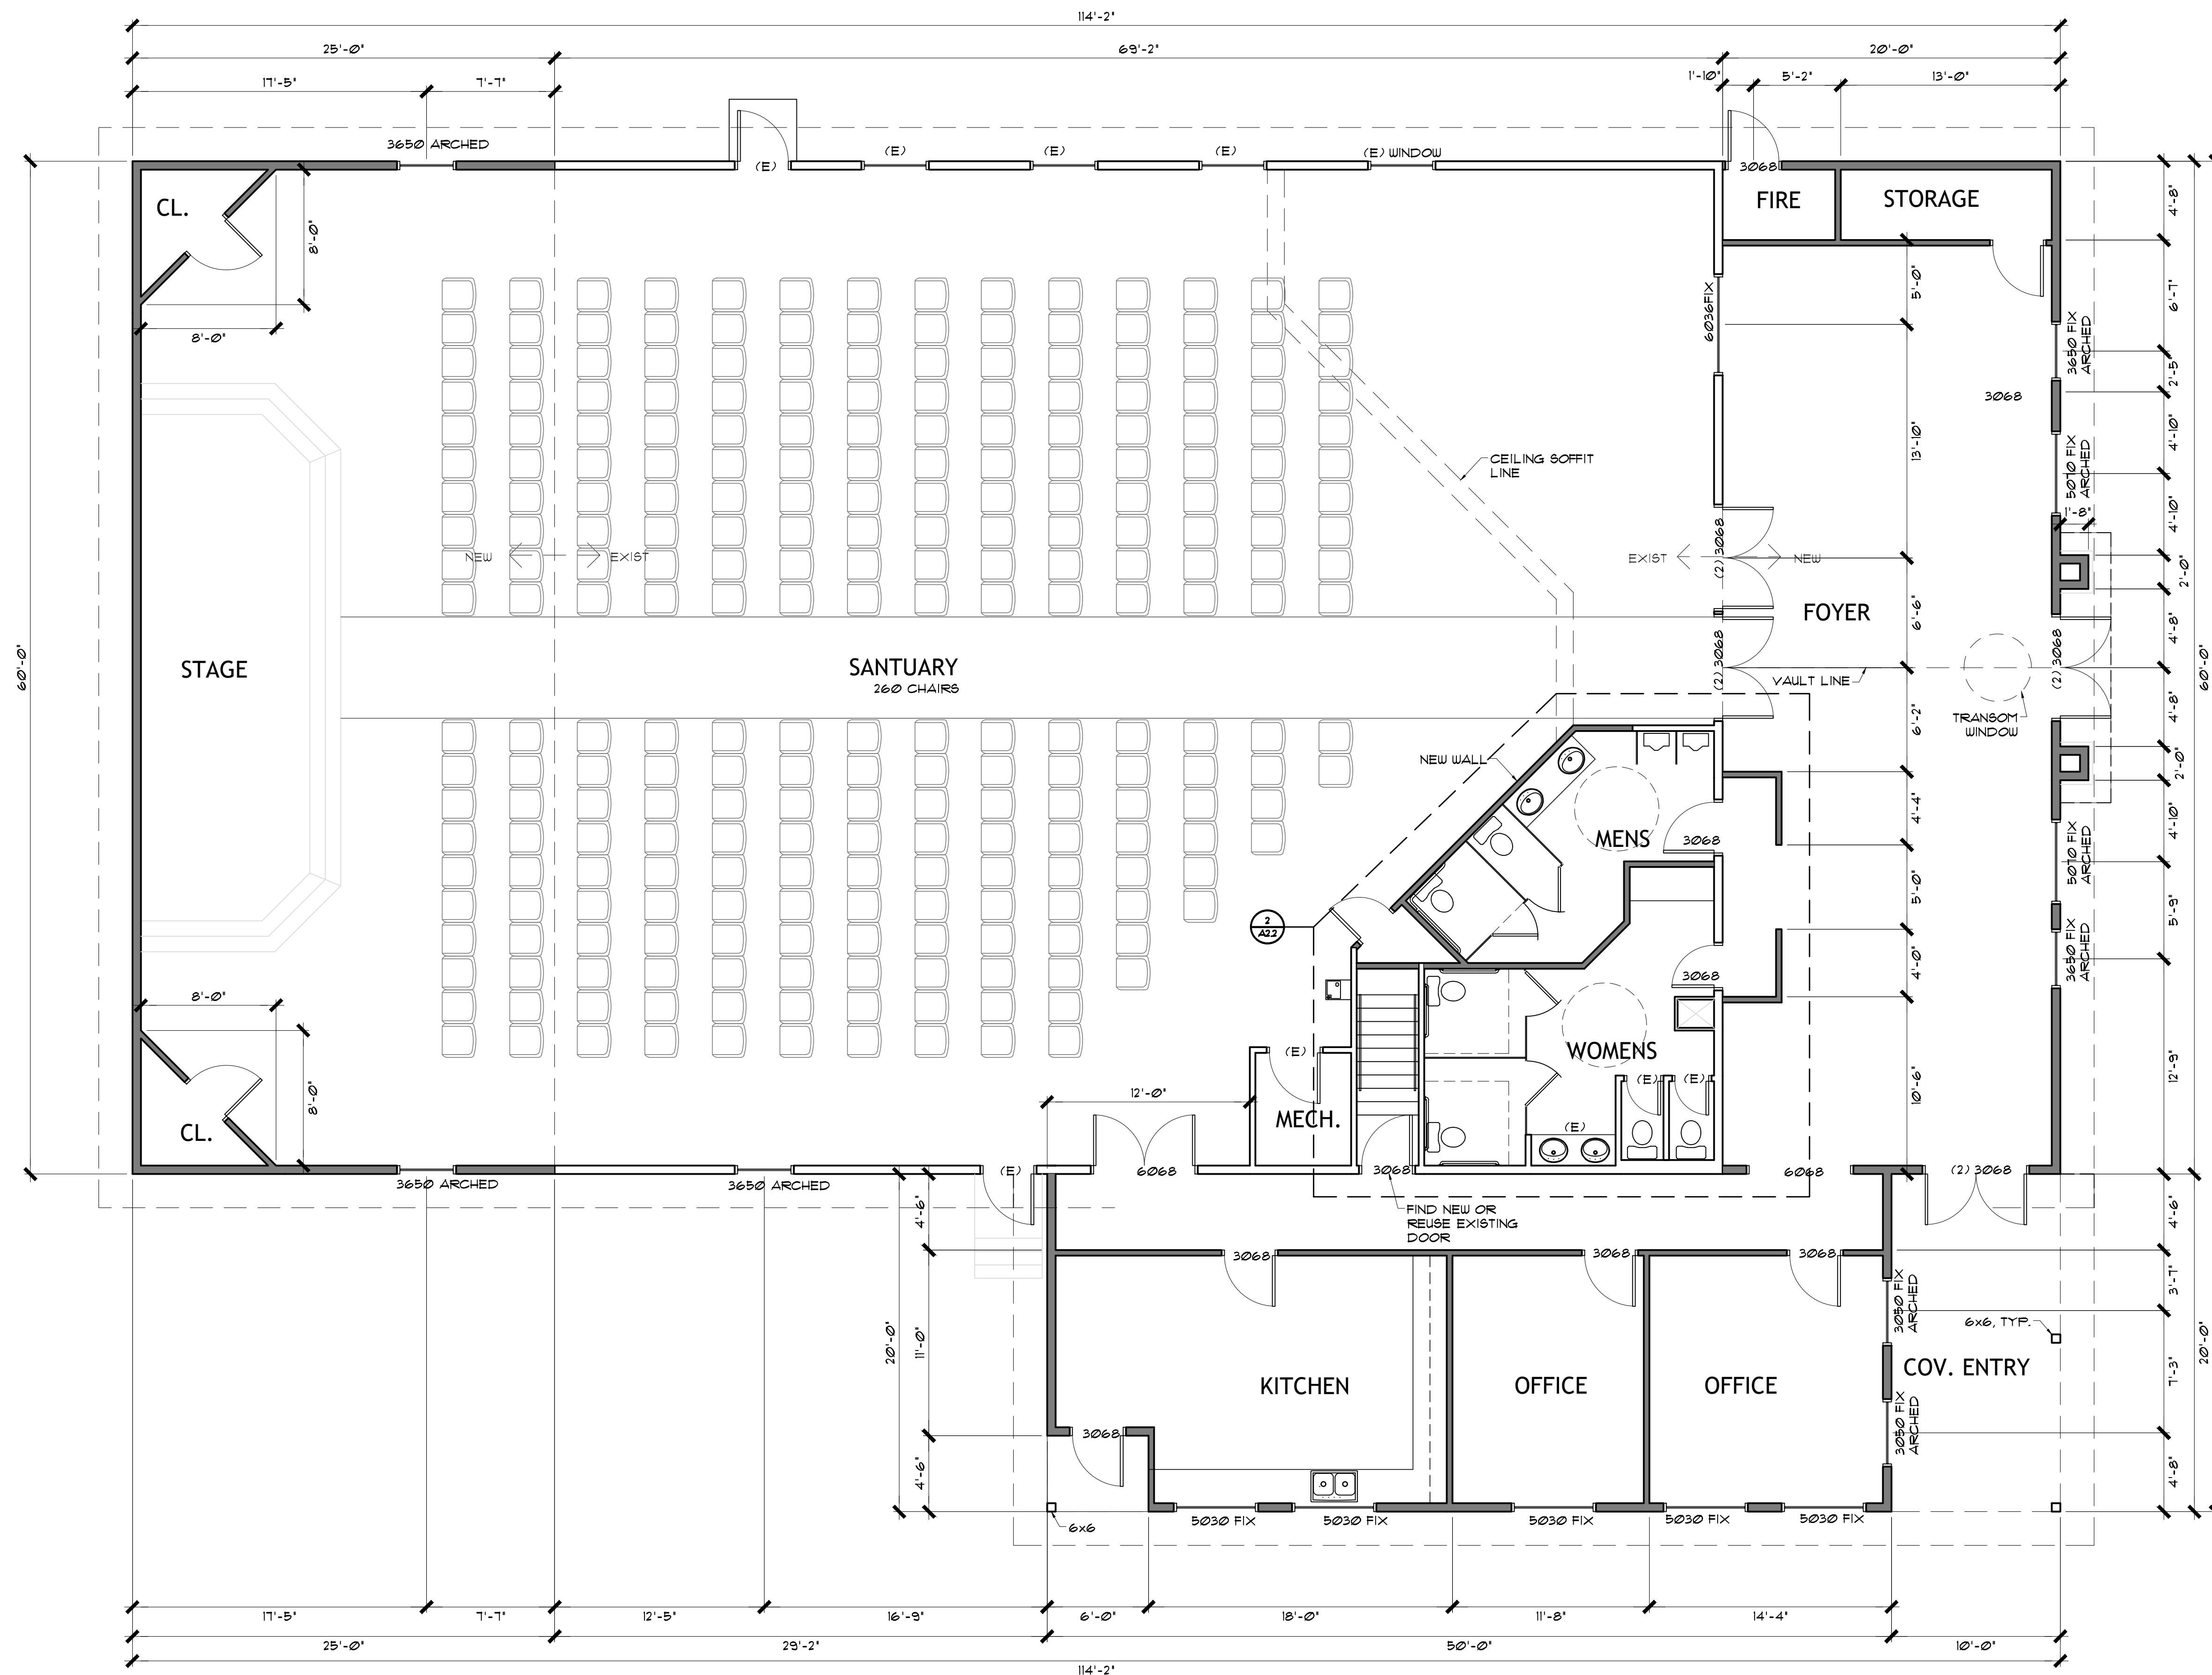

1
A2.1

FLOOR PLAN

SCALE: 3/16" = 1'-0"

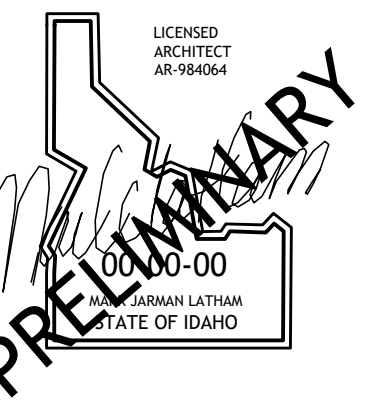


PROJECT NUMBER: 21-78
DATE: 07-21
DRAWN:
REVISIONS:

PRELIMINARY - NOT FOR CONSTRUCTION

TRINITY CHURCH
720 E POPLAR AVE
COEUR D'ALENE, ID


FLOOR PLAN

A2.1

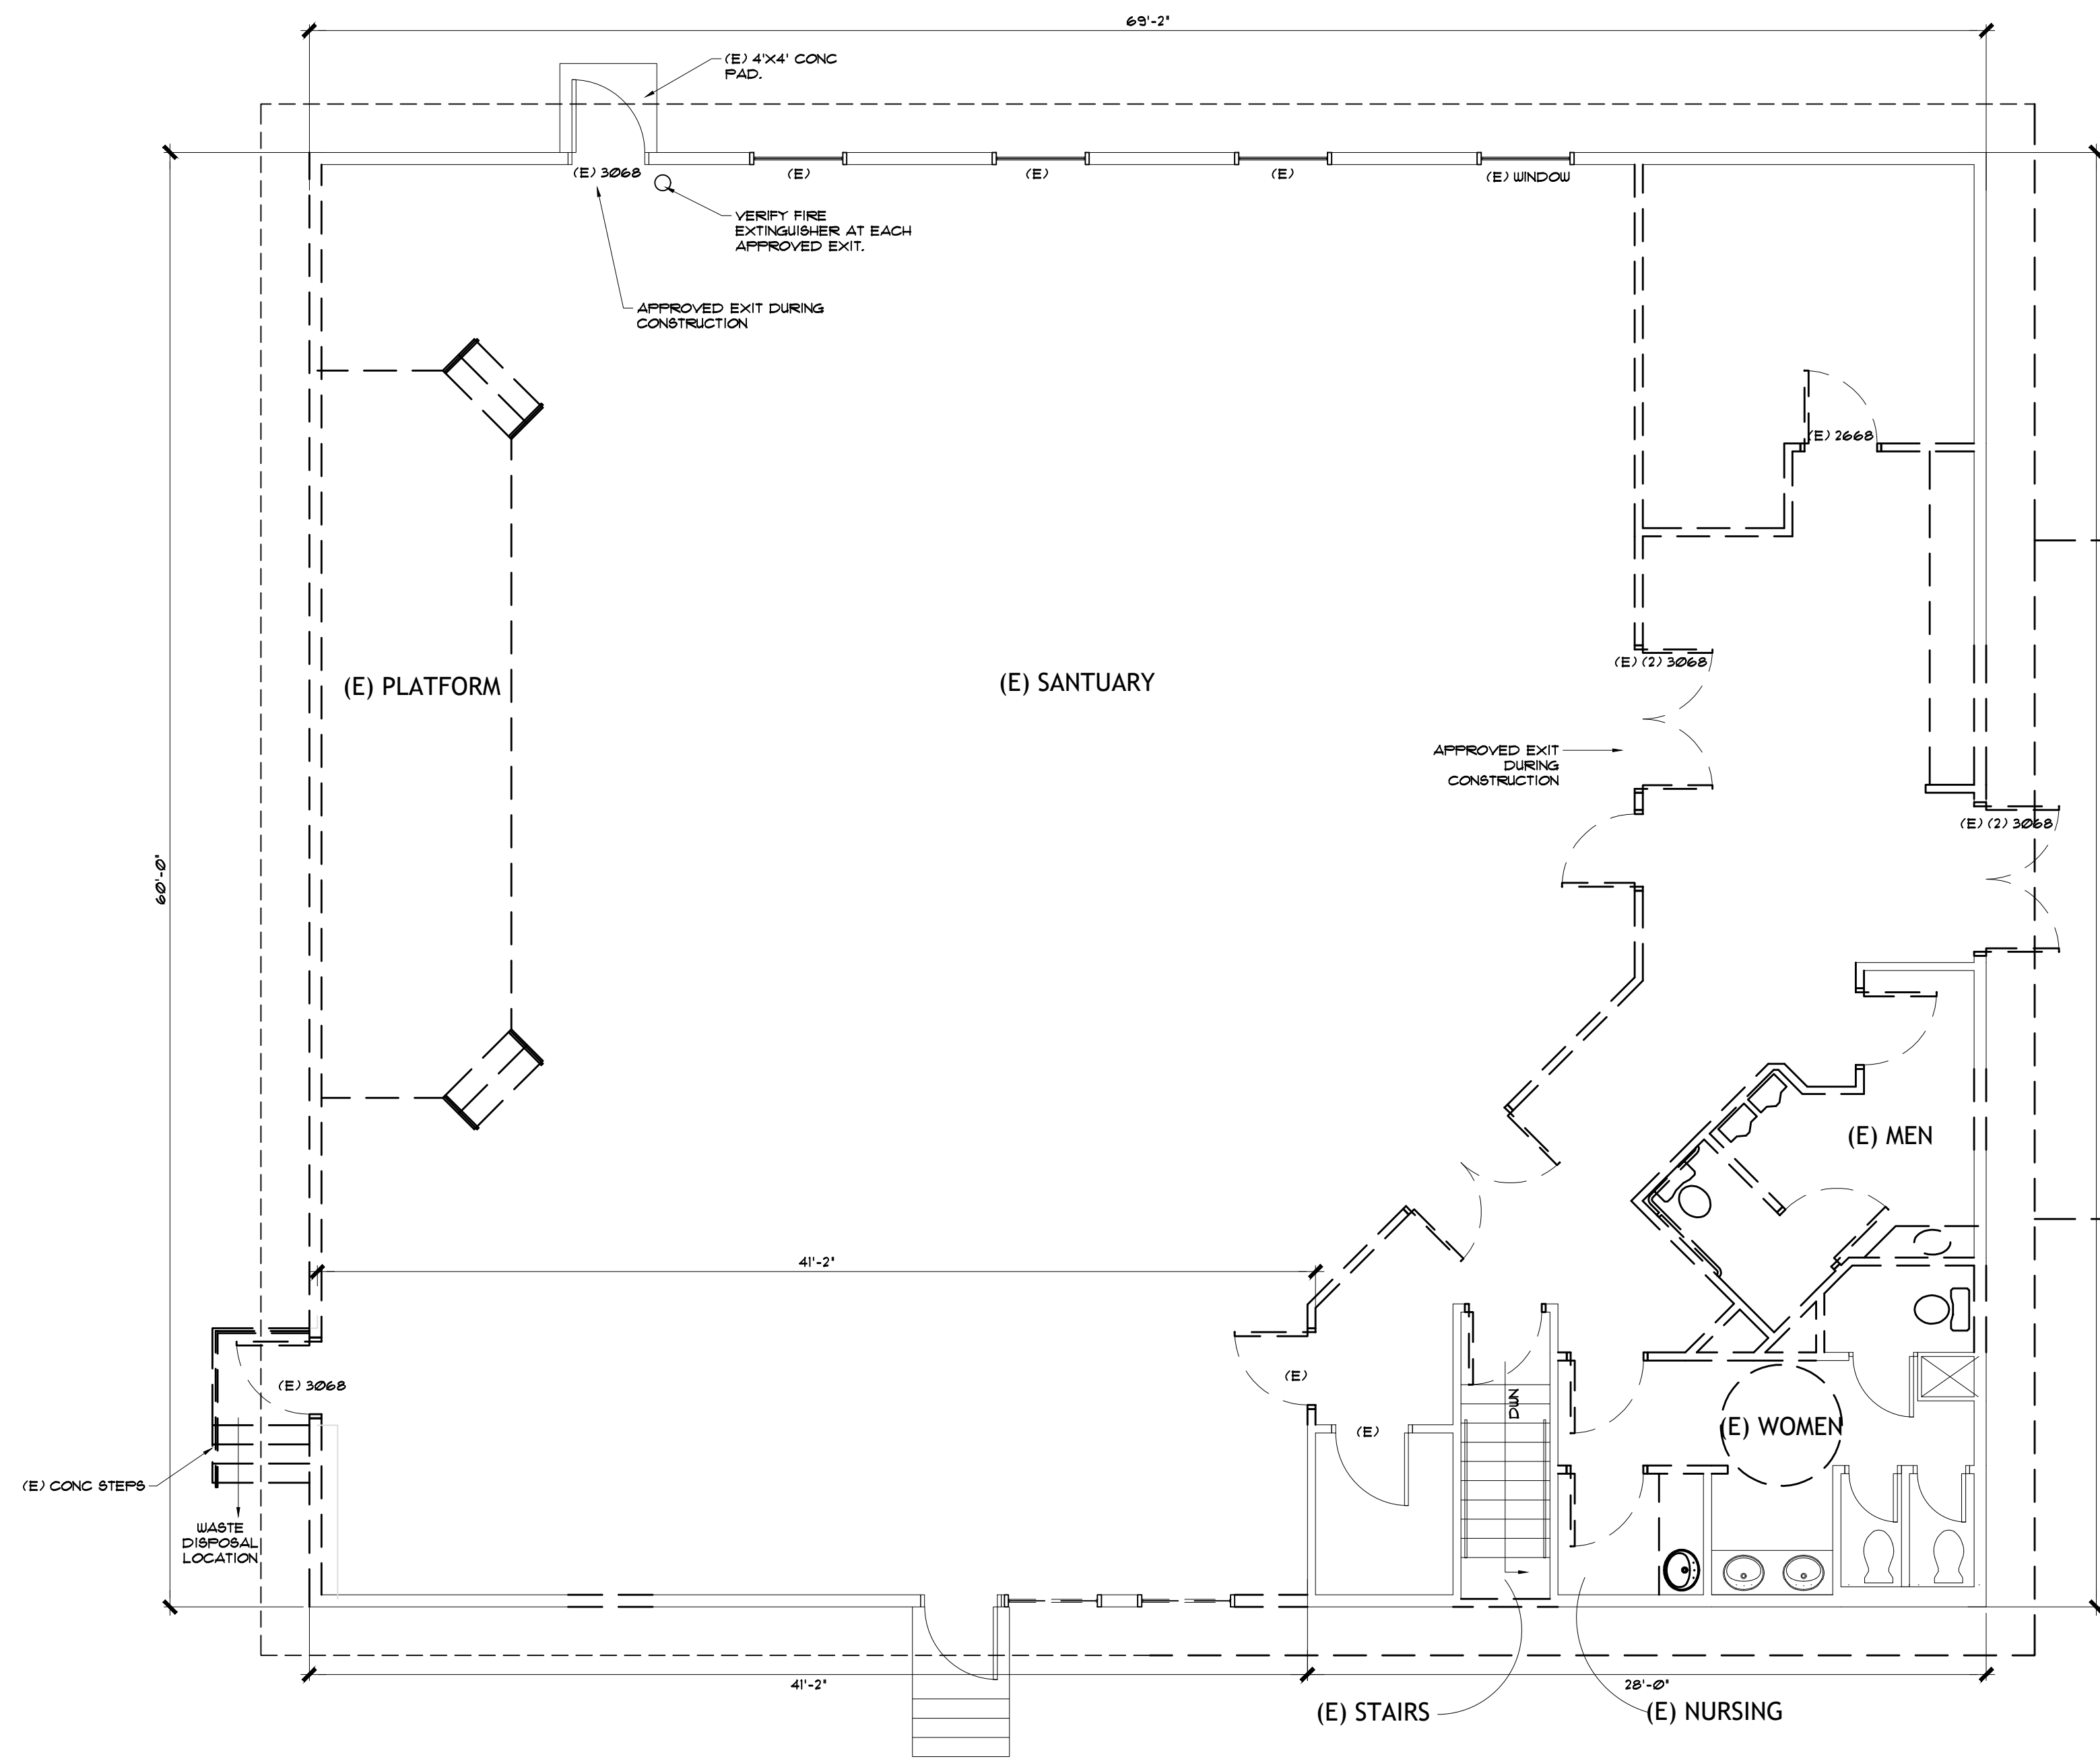


1 DEMO PLAN
 A2.2 SCALE: 3/16" = 1'-0"

- GENERAL DEMO NOTES**
- A. Items indicated to be removed and salvaged remain Owner's property. Remove, clean, and deliver to Owner's designated storage area.
 - B. Comply with EPA regulations and hauling and disposal regulations of authorities having jurisdiction.
 - C. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.
 - D. It is not expected that hazardous materials will be encountered in the Work. If materials suspected of containing hazardous materials are encountered, do not disturb. Immediately notify Architect and Owner. Owner will remove hazardous materials under a separate contract.
 - E. Maintain services/systems indicated to remain and protect them against damage during selective demolition operations. Before proceeding with demolition, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to other parts of the building.
 - F. Locate, identify, shut off, disconnect, and cap off utility services and mechanical/electrical systems serving areas to be selectively demolished.
 - G. Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain. If church services occur during construction, the area shall be barricaded. All systems shall be operational while the building is occupied, refer to IBC ch. 33.
 - H. Provide and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain or construction being demolished.
 - I. Provide temporary weather protection to prevent water leakage and damage to structure and interior areas.
 - J. Protect walls, ceilings, floors, and other existing finish work that are to remain. Erect and maintain dustproof partitions. Cover and protect furniture, furnishings, and equipment that have not been removed.
 - K. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction.
 - L. Promptly remove demolished materials from Owner's property and legally dispose of them. Do not burn demolished materials.

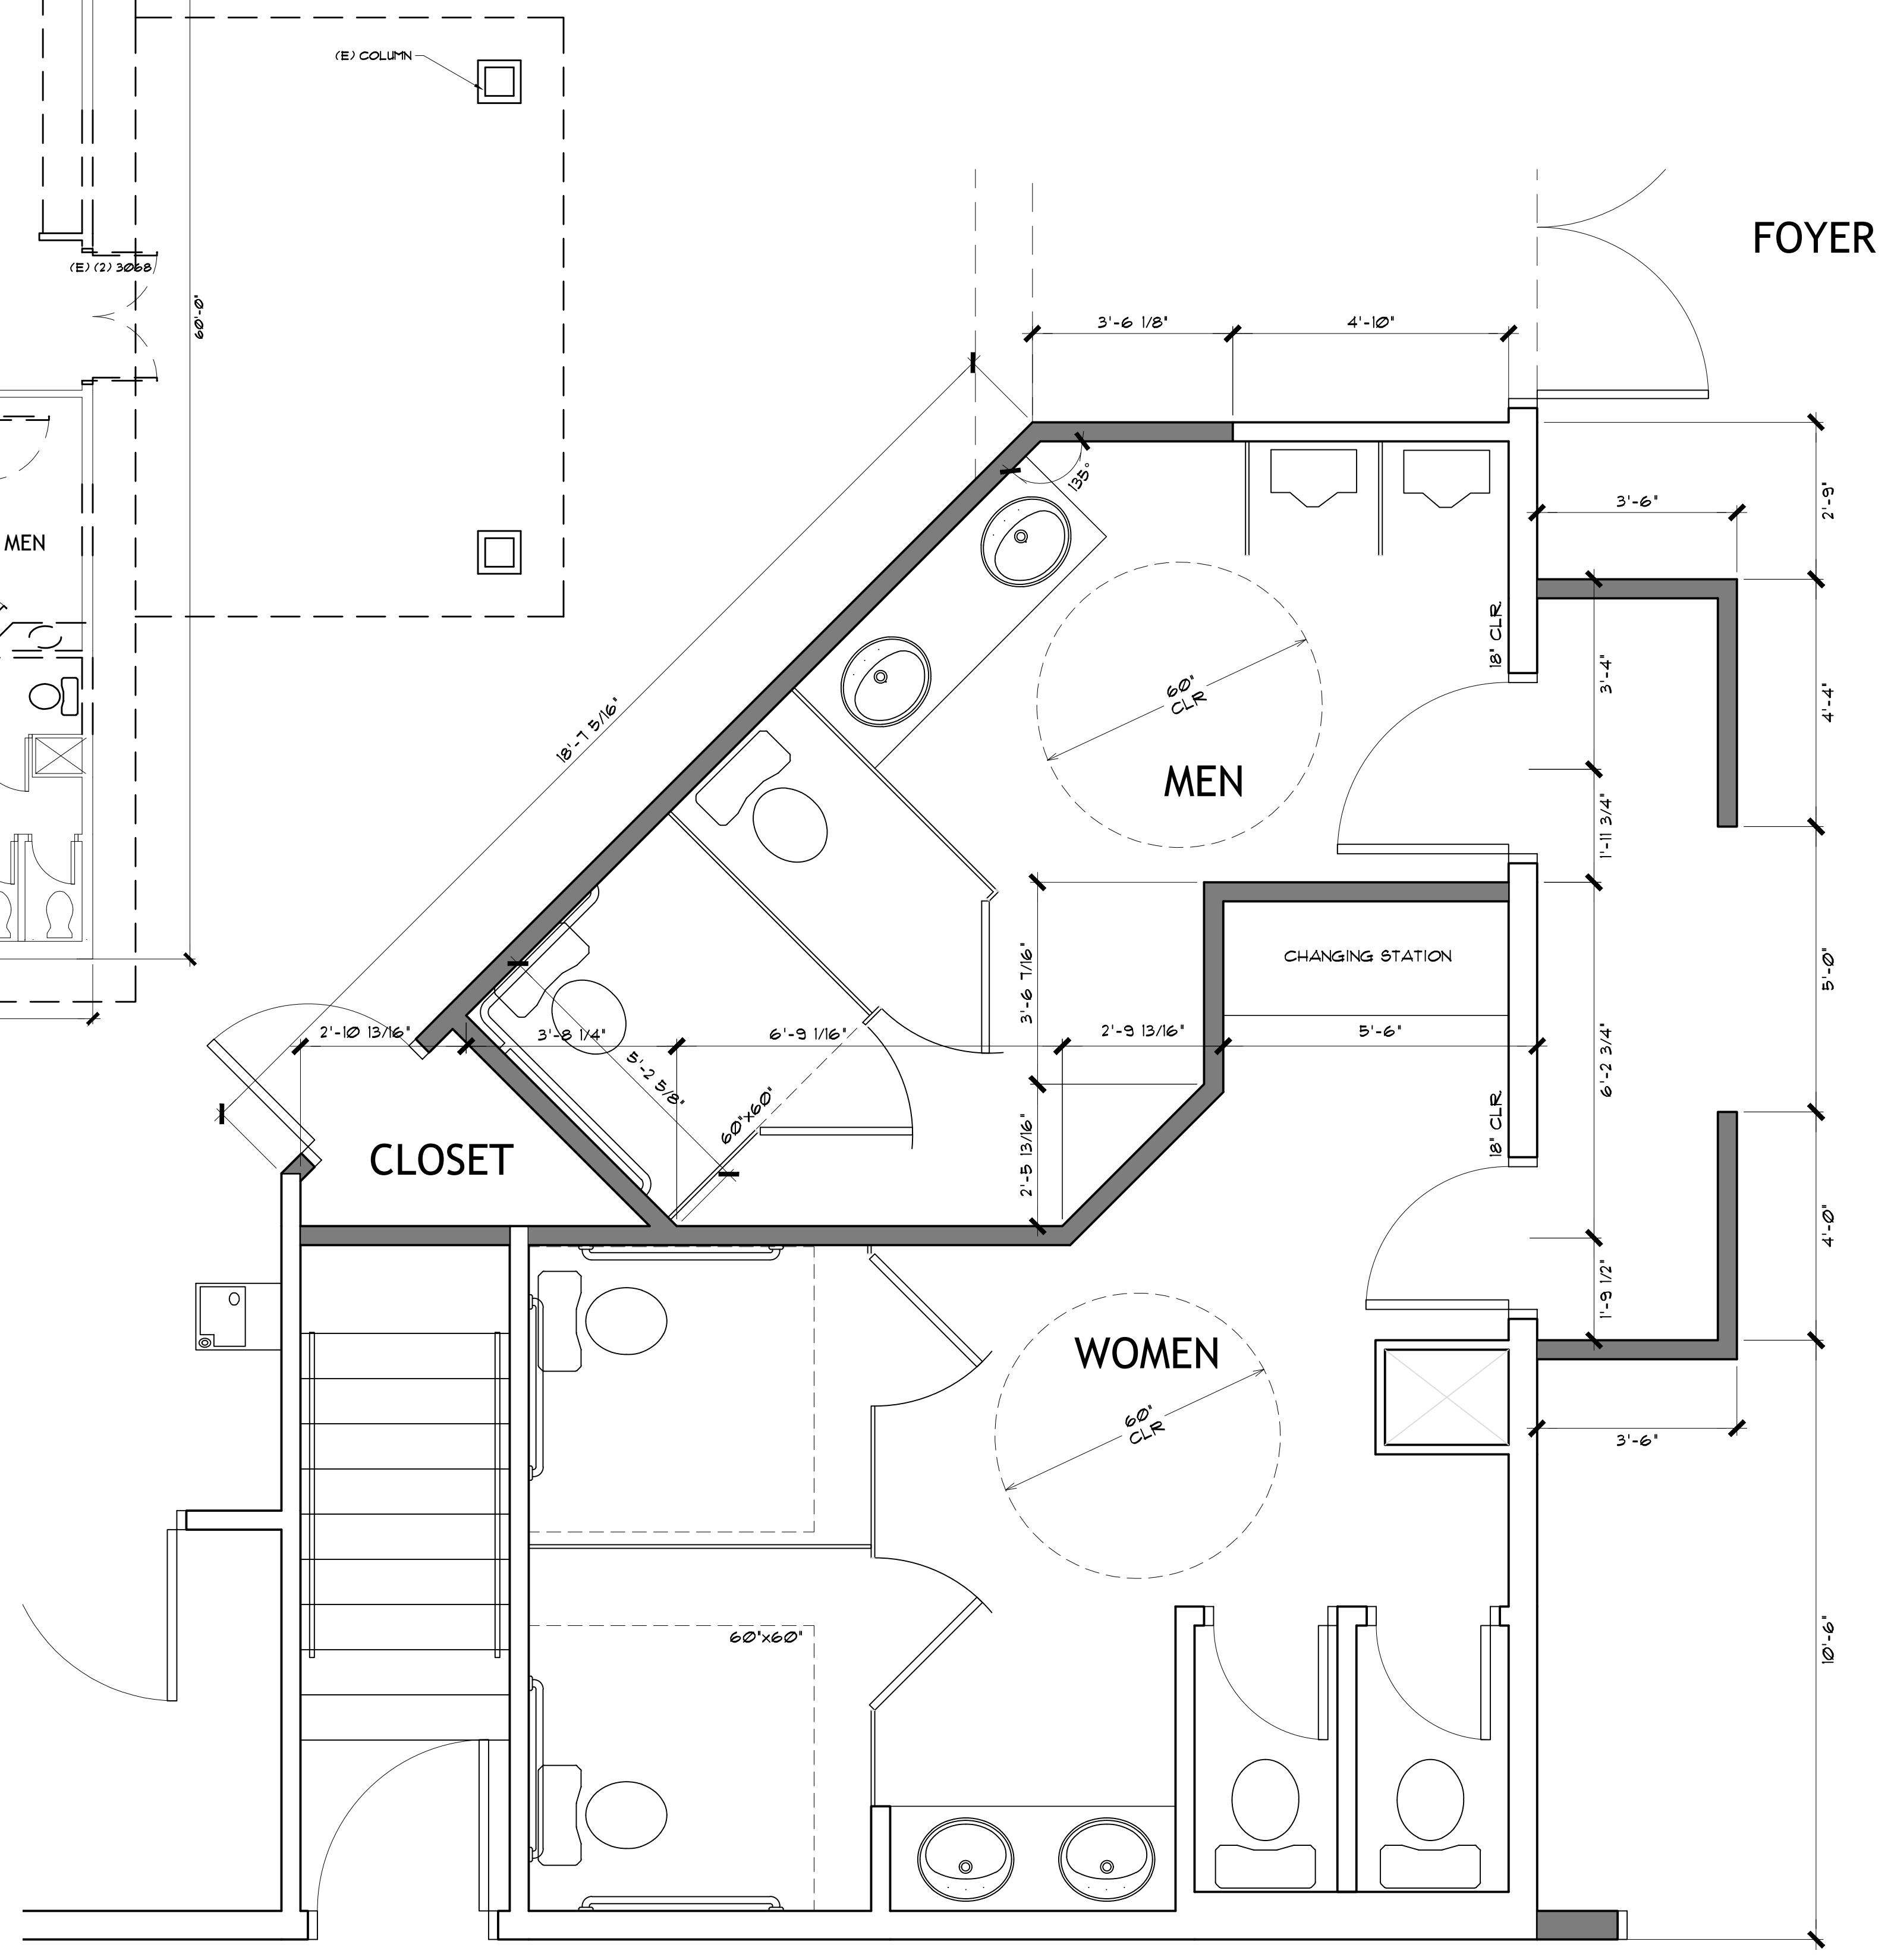

2 ENLARGED FLOOR PLAN
 A2.2 SCALE: 1/4" = 1'-0"

PRELIMINARY - NOT FOR CONSTRUCTION

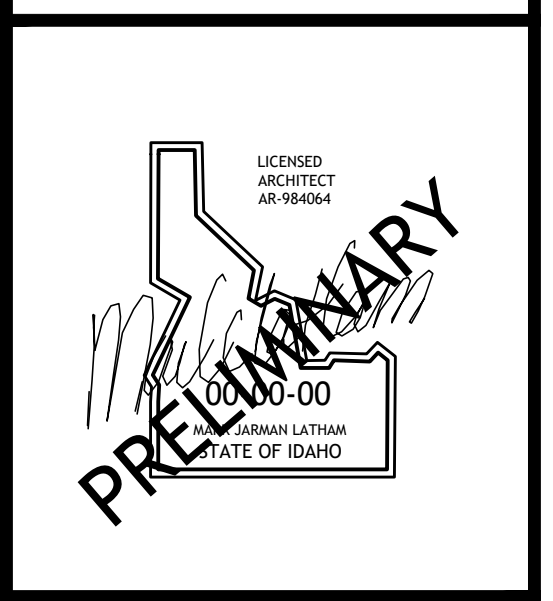


PROJECT NUMBER: 21-78
 DATE: 07-21
 DRAWN:
 REVISIONS:

TRINITY CHURCH
 720 E POPLAR AVE
 COEUR D'ALENE, ID

ENLARGED & DEMO
 FLOOR PLANS

A2.2

© COPYRIGHT 2014 ML ARCHITECT & ASSOCIATES

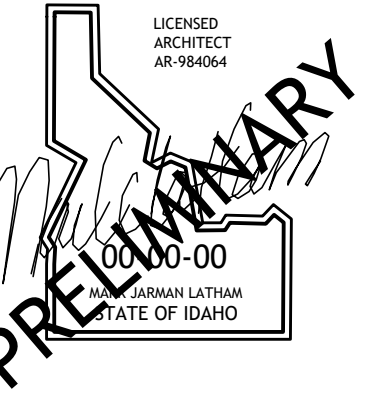

PROJECT NUMBER: 21-78
DATE: 07-21
DRAWN: -
REVISIONS: -

TRINITY CHURCH
720 E POPLAR AVE
COEUR D'ALENE, ID

EXTERIOR
ELEVATIONS

A3.1


PRELIMINARY - NOT FOR CONSTRUCTION



1
A3.1 **NORTH ELEVATION**
SCALE: 1/4" = 1'-0"

NEW ← → EXIST


EXIST ← → NEW

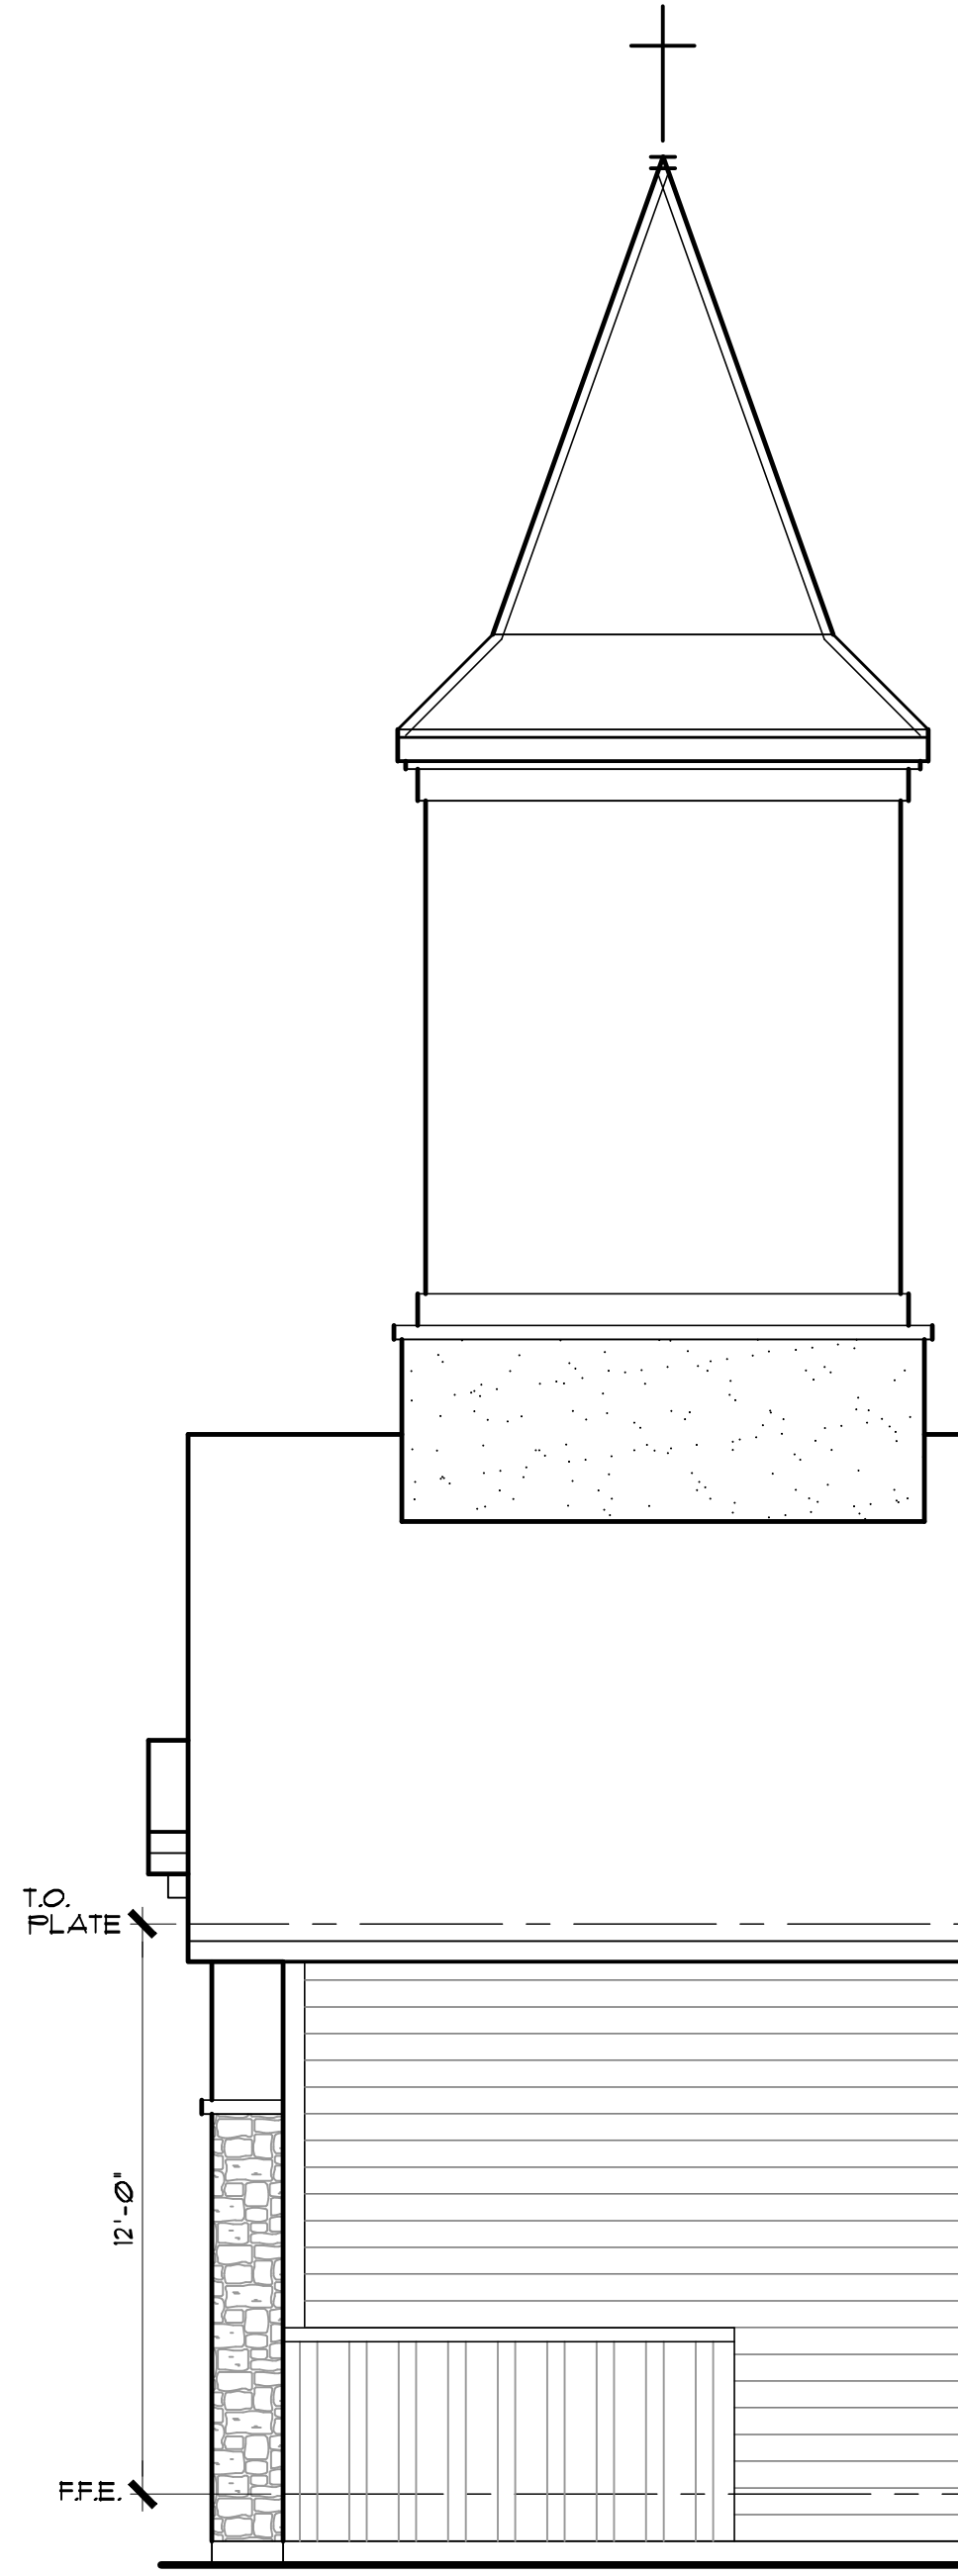

2
A3.1 **WEST ELEVATION**
SCALE: 1/4" = 1'-0"

EXISTING DOOR AND WINDOW

NEW ARCHED WINDOW

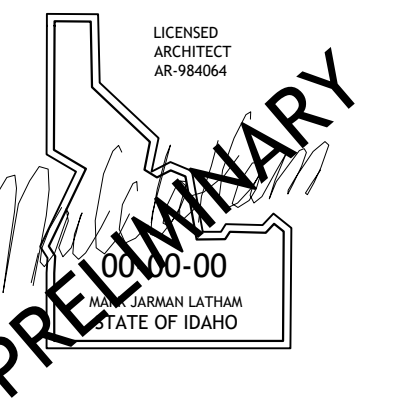

PROJECT NUMBER: 21-78
DATE: 07-21
DRAWN: -
REVISIONS: -

TRINITY CHURCH
720 E POPLAR AVE
COEUR D'ALENE, ID


PRELIMINARY - NOT FOR CONSTRUCTION

EXTERIOR ELEVATIONS

A3.2




1
A3.2 **SOUTH ELEVATION**
SCALE: 1/4" = 1'-0"

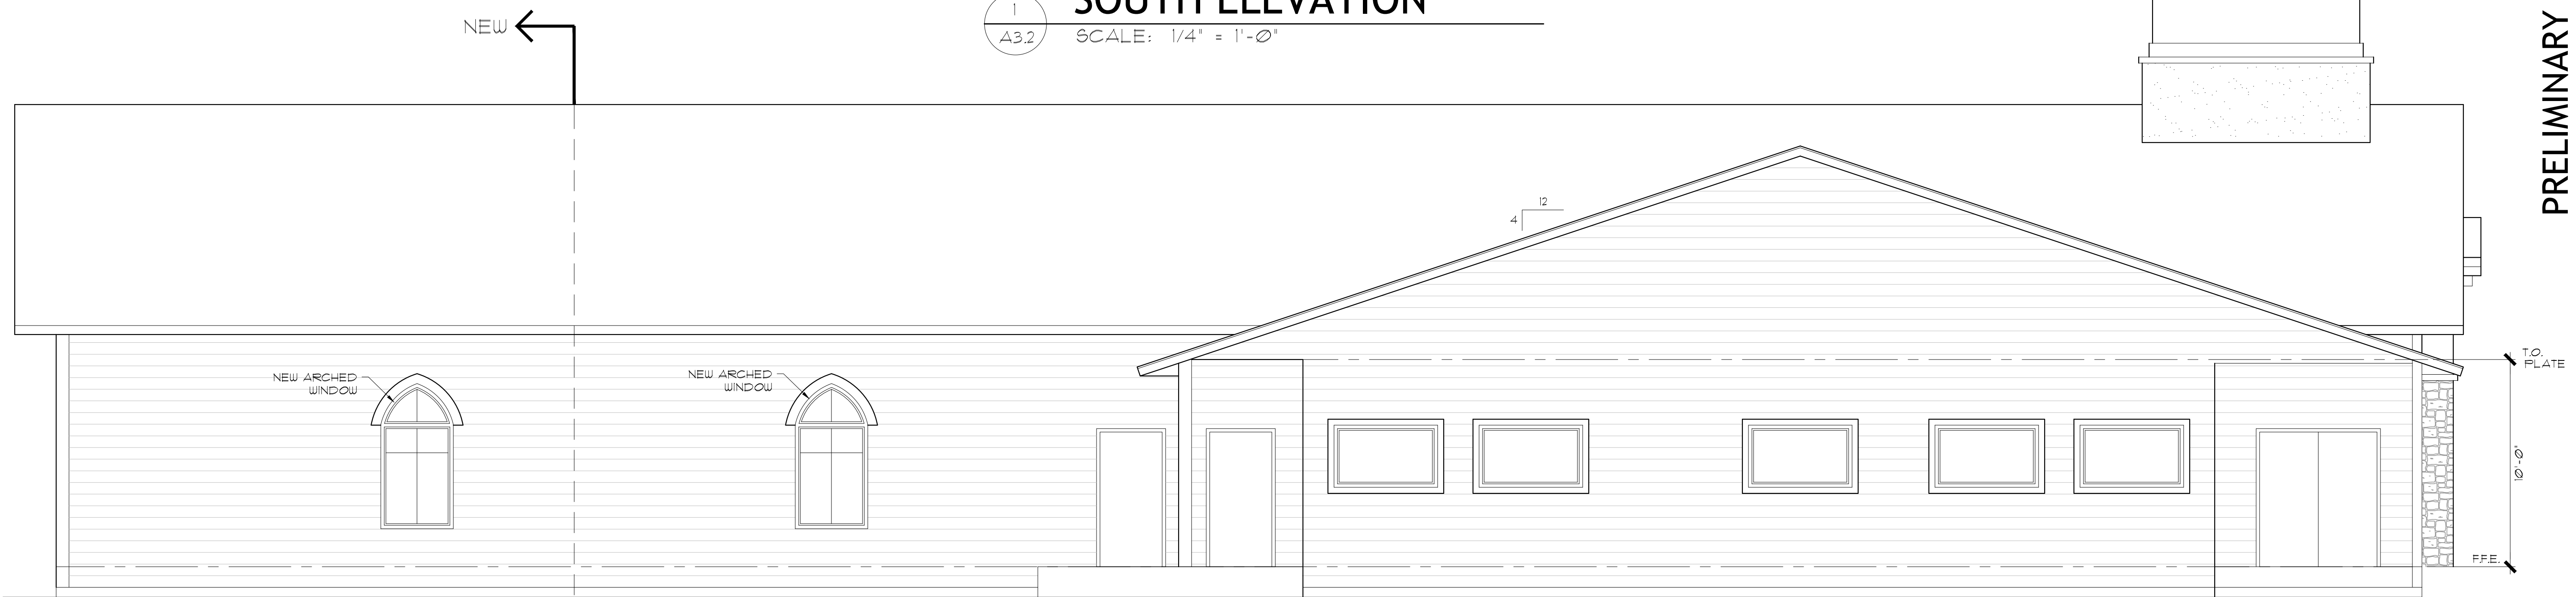

2
A3.2 **EAST ELEVATION**
SCALE: 1/4" = 1'-0"

ELECTRICAL LEGEND	
	GARAGE DOOR OPENER
	WALL RECEPTACLE
	240 VOLT ELECTRICAL RECEPTACLE
	GROUND FAULT INTERRUPTER RECEPTACLE
	WATERPROOF GROUND FAULT INTERRUPTER RECEPTACLE
	OUTLET ON DEDICATED CIRCUIT
	SWITCH
	3-WAY SWITCH
	DIMMER SWITCH
	ELECTRICAL SMOKE DETECTOR W/ BATTERY BACKUP
	CARBON MONOXIDE DETECTOR - INTERCONNECT TO SMOKE DETECTORS
	EXHAUST FAN
	LIGHT/EXHAUST FAN COMBO
	COMMUNICATION OUTLET (2 CAT V DATA/PHONE W/ DUPLX PHONE/DATA COVERPLATE)
	CABLE JACK
	SOUND PORT / MICROPHONE JACK
	THERMOSTAT
	RECESSED WALL-MOUNTED ELECTRIC UNIT HEATER
	J-BOX WITH CAPPED WIRES FOR FUT. USE


LIGHTING LEGEND	
Symbol	Description
	10' X 48' SURFACE MOUNTED LOW PROFILE CURVED-BASKET LED WRAP AROUND. PATTERNED ACRYLIC LENS. 32 WATT LED. 3500K COLOR
	24" OR 48" STRIP LED (CLOSET OR UNDER CABT USE) 50 WATT. 120 VOLT. SNAP ON FROSTED DIFFUSER. 3500K COLOR LITHONIA ZL1N.
	SURFACE MOUNT 48" STRIP LED, 2 TUBE (40) WATT RAB STRIP-LED. 4000K COLOR. WHITE. (SURFACE MOUNT) (CHAIN HUNG)
	4" DIA. LED RECESSED CAN LIGHT, INSULATED LOCATION, IC RATED. NO LENS, PARABOLIC REFLECTOR, WHITE FLANGE. LED DRIVER FOR DIMMABLE. 18 WATT OR 1500 LUMENS. 2700K TEMP. LITHONIA LDN4 OR HALO PD415.
	6" DIA. LED RECESSED CAN LIGHT, NON-INSULATED LOCATION, NON IC RATED. NO LENS, PARABOLIC REFLECTOR, WHITE FLANGE. LED DRIVER FOR DIMMABLE. 25 WATT OR 2000 LUMENS. 2700K TEMP. LITHONIA LDN6 OR HALO PD620
	6" DIA. LED RECESSED CAN LIGHT, INSULATED LOCATION, IC RATED. NO LENS, PARABOLIC REFLECTOR, WHITE FLANGE. LED DRIVER FOR DIMMABLE. 18 WATT OR 1500 LUMENS. 2700K TEMP. LITHONIA LDN6 OR HALO PD615.
	6" DIA. LED RECESSED CAN LIGHT, APPROVED FOR WET LOCATION, IC RATED. FROSTED FLAT LENS, WHITE FLANGE. LED DRIVER FOR DIMMABLE. 18 WATT OR 1500 LUMENS. 2700K TEMP.
	4" DIA. LED RECESSED CAN LIGHT, INSULATED LOCATION, IC RATED, WHITE BAFFLE, WALL WASH LENS. LED DRIVER FOR DIMMABLE. 5000 LUMENS. LITHONIA LDN6. 2700K TEMP. LW8 WALL WASH.
	MR-16 HALOGEN PENDANT LIGHT - SELECTED BY OWNER
	"BATH BAR" VANITY FIXTURE. LITHONIA FMVCSL, 36" LONG, 120V, 2700K TEMP. 20 WATT. BRUSHED NICKEL FINISH. OR...
	"BATH BAR" VANITY FIXTURE. LITHONIA FMVTSL, 36" LONG, 120V, 2700K TEMP. 20 WATT. BRUSHED NICKEL FINISH.
	TRACK LIGHT SYSTEM. 48" OR 84" TRACK. COLOR: WHITE, BRONZE OR BLACK. TRACK LIGHTS: 10W LED, FLOOD, DIMMABLE, 2700K COLOR. FINISH: BRONZE, WHITE, OR BLACK. JUNO "TRAC-MASTER" WITH R800L LIGHTS.
	SINGLE TUBE 18 WATT LED DECORATIVE WALL FIXTURE SELECTED BY OWNER
	CHAIN SUSPENDED DECORATIVE CEILING MOUNTED CHANDELIER SELECTED BY OWNER
	UPLIGHT/DOWNLIGHT DECORATIVE WALL SCONCE. 32 WATT COMPACT FLUORESCENT ON PHOTO CELL w/ TIME CLOCK OVERRIDE - SELECTED BY OWNER
	FLUSH MOUNT OR PENDANT MOUNT CEILING FAN WITH LIGHT COMBO. (LOW PROFILE TYPE FOR LOW CEILING)
EXTERIOR LIGHTING:	
	WAC LIGHTING "TUBE". MODEL WS-W2604. UPLIGHT AND DOWNLIGHT. BRONZE FINISH. 120 V. 3000K TEMP. HIGH OUTPUT LED
	DECORATIVE OUTDOOR LANTERN. TECH LIGHTING "ASH" 12" BRONZE WITH CLEAR CYLINDER. 18 WATT. 2700K COLOR.
	DECORATIVE WALL PACK. MCGRAW-EDISON ISW TYPE IV FORWARD THROW. 50 WATT, 3000K COLOR. FINISH: BRONZE.
	WALL PACK WITH DUAL ADJUSTABLE LED LIGHTS ON MOTION SENSOR. 50 WATT, 3000K COLOR. FINISH: BRONZE.

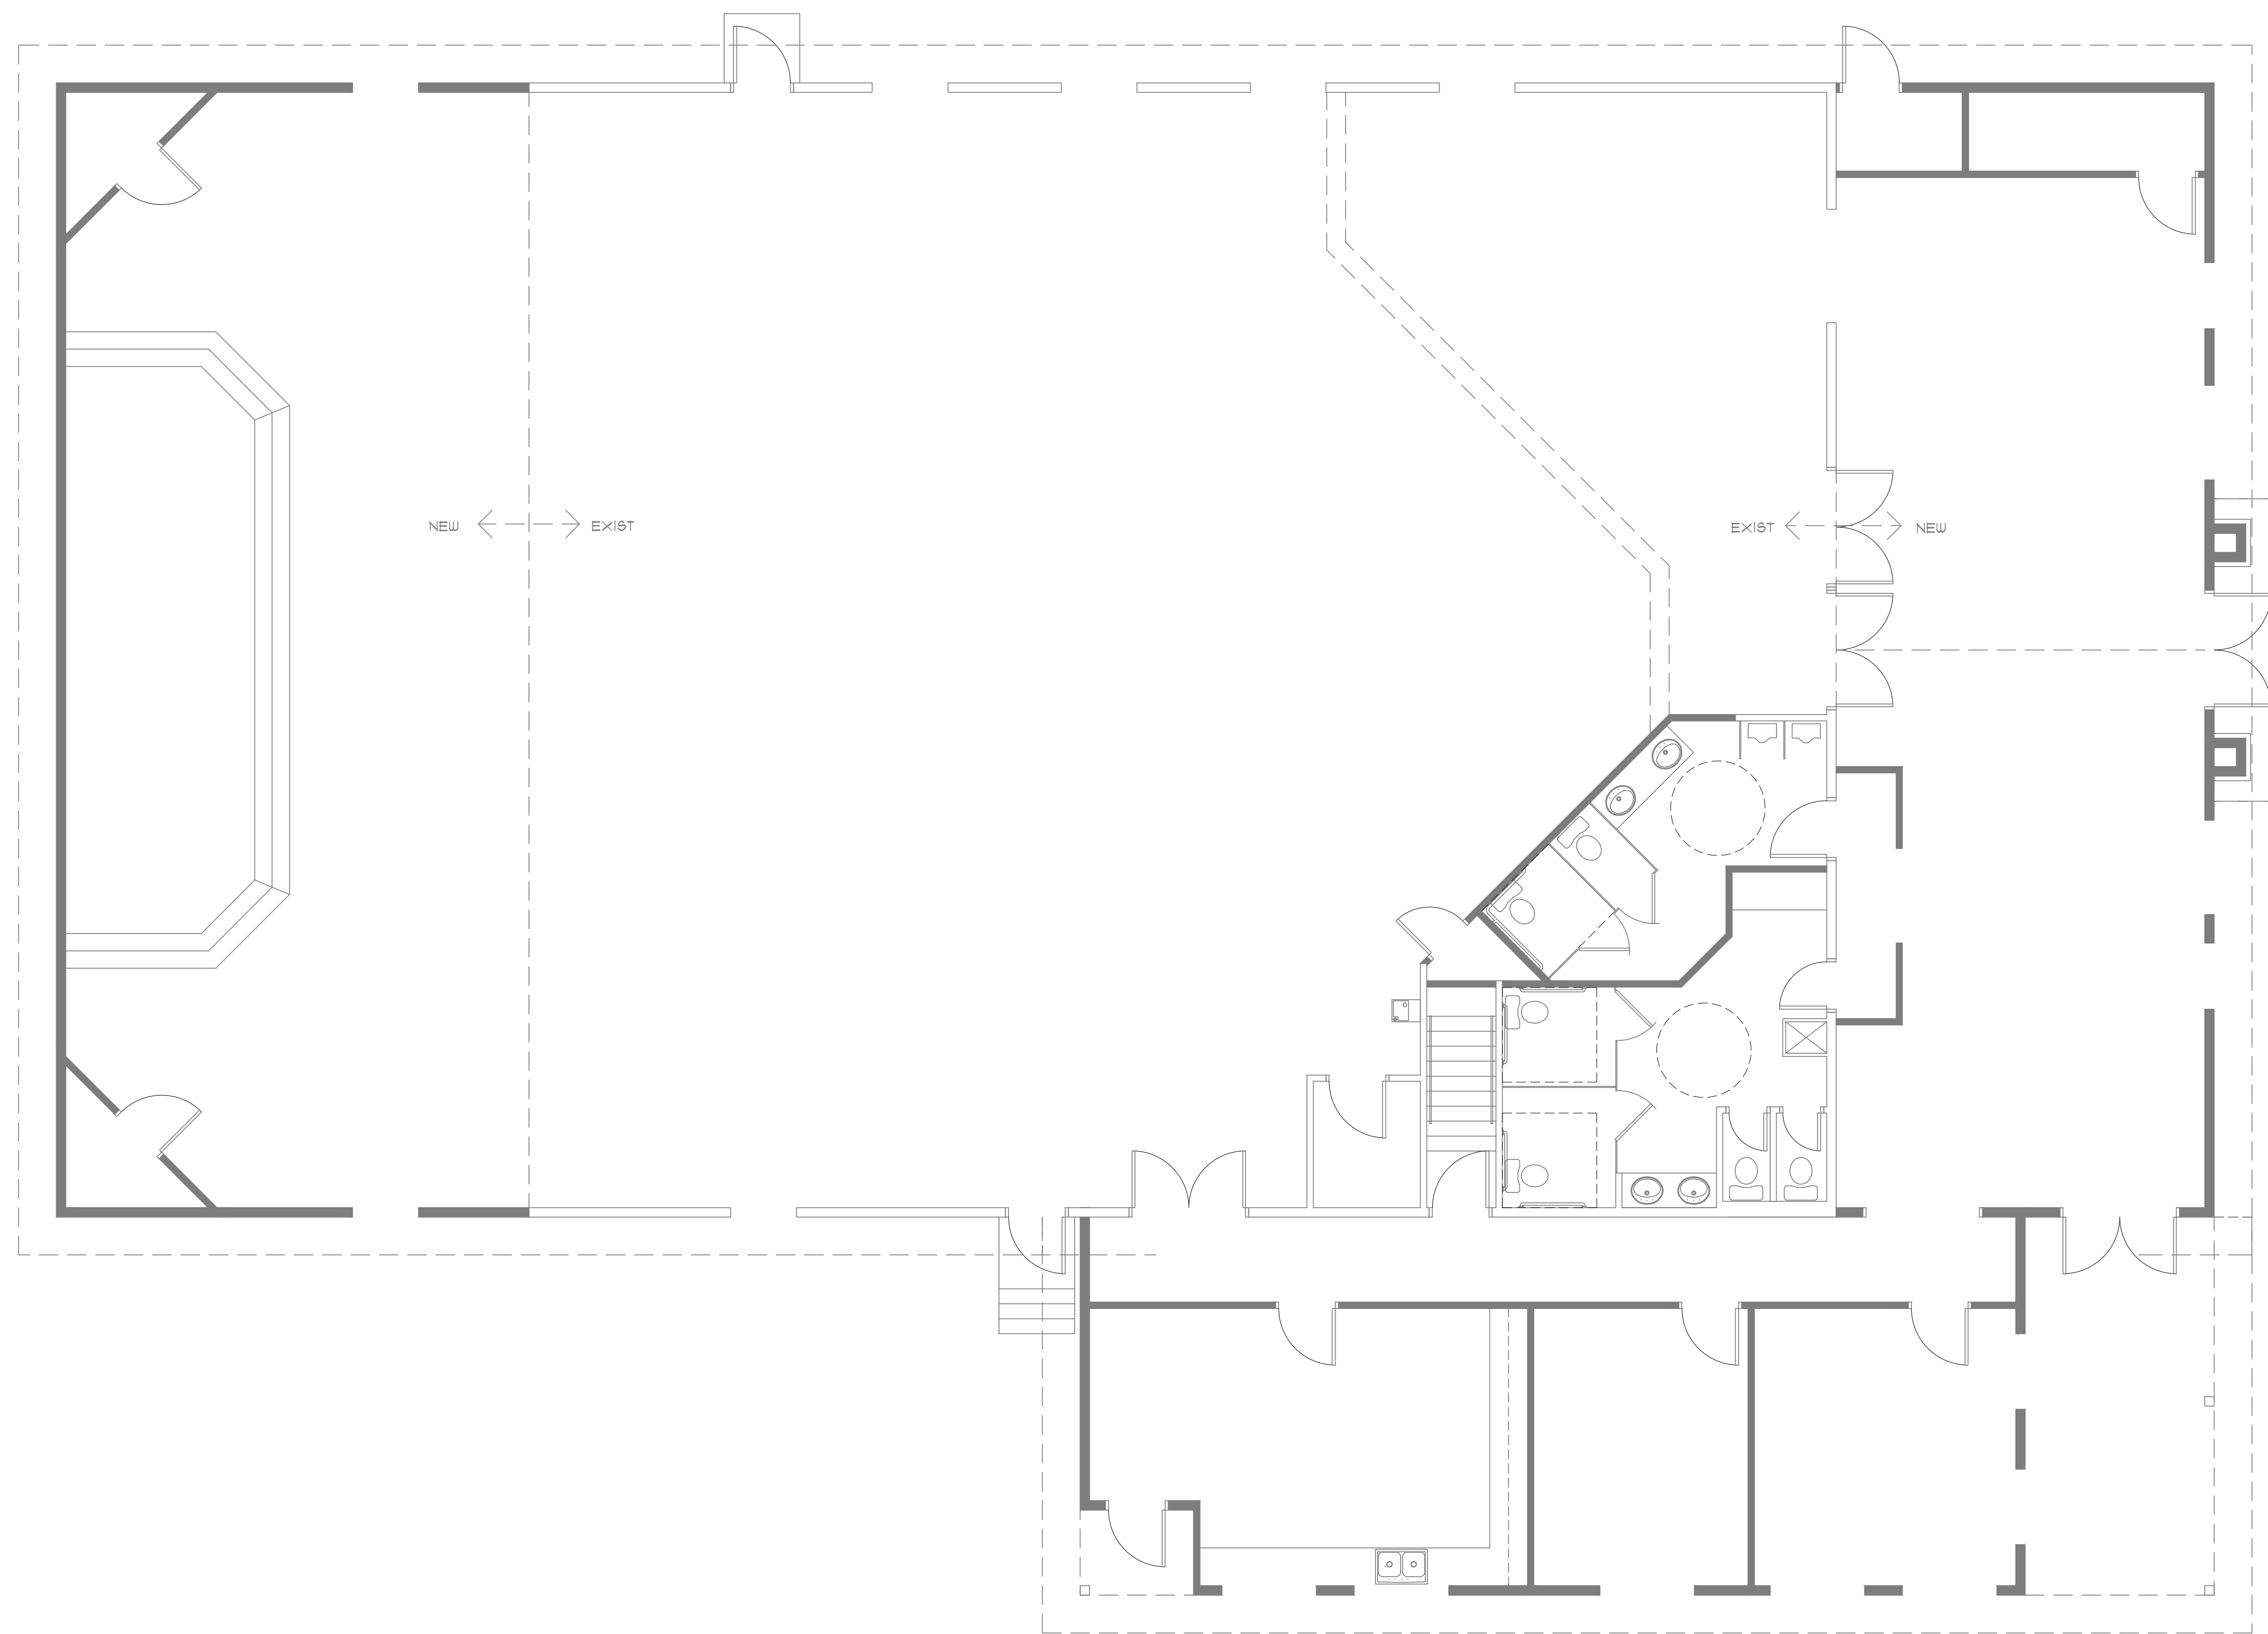

1
A6.1

MAIN FLOOR LIGHTING/ELECTRICAL PLAN


NOT TO SCALE



PRELIMINARY - NOT FOR CONSTRUCTION



607 E. 6th Avenue
Post Falls, Idaho 83854
PH: (208) 773-9864
mark@ml-architect.com

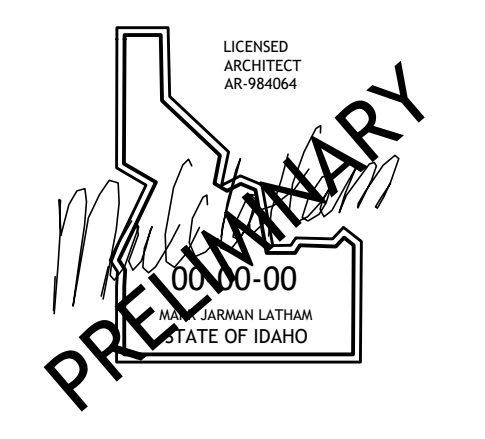

PROJECT NUMBER: 21-78
DATE: 07-21
DRAWN: -
REVISIONS: -

TRINITY CHURCH
720 E POPLAR AVE
COEUR D'ALENE, ID

MAIN FLOOR
LIGHTING/
ELECT. PLAN

A6.1

© COPYRIGHT 2014 ML ARCHITECT & ASSOCIATES

